



INVESTOR IN PEOPLE

The Patent Office

Concept House

Cardiff Road

Newport REC'D 27 APR 2004

South Wales

NP10 8QW IPO

PCT

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

16 April 2004

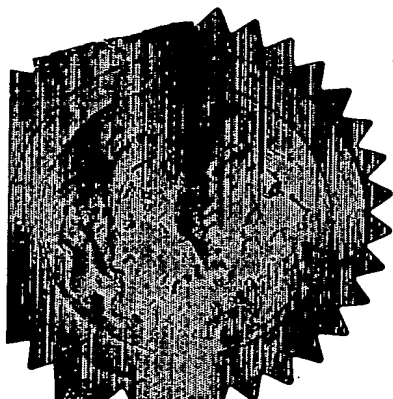

BEST AVAILABLE COPY



1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE

E

10 APR 2003

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

10 APR 2003

HL84699/000/ASG

11APR03 E799383-1 D02847

2. Patent application number

(The Patent Office will fill in this part)

0308291.4

P01/7700 0.00-0308291.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

DYNAMIC PROCESSING SOLUTIONS PLC
Dynamic House, 8-10 Combe Road
Portishead, Bristol, BS20 6BJ

Patents ADP number (*if you know it*)

08396152001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

FILTRATION APPARATUS

5. Name of your agent (*if you have one*)

Haseltine Lake

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

Imperial House
15-19 Kingsway
London
WC2B 6UD

Patents ADP number (*if you know it*)

34001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 16

Claim(s) 3

Abstract 1

Drawing(s) 6 + 6

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77) -

Any other documents (please specify) -

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr A S Giles

[0117] 910 3200

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

FILTRATION APPARATUS

This invention relates to an improved apparatus for filtration.

5

Background to the invention

There is a considerable need worldwide to generate more pure water for potable and industrial uses, which itself
10 creates both domestic and industrial waste streams requiring further treatment prior to recycling or discharge to the environment. The use of cartridge filter elements that require frequent cleaning or changing, although an efficient means of filtration,
15 creates a waste stream of used cartridge elements which is a further waste disposal problem.

It is also known to carry out downflow and upflow filtration of suspended solids from a liquid stream using
20 a granular media bed, either atmospherically in concrete, plastic, metal or GRP tanks or above atmospheric pressure inside a suitably designed pressure vessel manufactured in metal, plastic or GRP. Many variants are known in distribution and collection methodology, in the media
25 selection, and in chemical enhancement and filtration velocities.

The space and weight requirements of current filtration devices is also becoming a limiting factor in expanding
30 or new build water treatment facilities, particularly for use on offshore oil exploration and production platforms. There is a need therefore for a compact media filter that

minimises discharge to the environment, uses the minimum media wash water, and has the ability to operate successfully under the type of motions experienced on floating production facilities.

5

It is also known to use a radial media filter that has the ability to wash its media whilst online. This provides advantages, both in terms of the throughput versus space and weight, and allows the filter to operate whilst under the influence of gravitational forces due to motion.

10

Although the better designs go a good way to answering some of the problems associated with radial filtration and the backwash of its media, they do have some features which limit their effectiveness, such as a peripheral inlet screen that defines an annulus to receive water to be filtered, and distribute it radially into the media bed. In practice this screen is expected to retain media and inhibit it from entering the inlet distribution annulus. Should a very fine media be utilised then this screen's open area will be required to have a very small gap size to retain the fine media, and as such will act as an edge filter for large particles at the filter's inlet, so that filtration takes place on the outside of the inlet screen in the inlet annulus area.

15

20

25

This is undesirable as it will require a method of cleaning this screen or at least a strainer upstream of the filter to ensure that no particles larger than the screen gap size are delivered to the filter. Also, the central collection screen of this unit has no media

30

support material, which means that the inner collection screen must also have a very fine screen gap size, one example of which would be a wedge wire screen.

5 The fluxrate (volumetric flowrate of raw water per unit area) for a given flowrate in a radial filter increases as the flow approaches the centre of the filter. The Reynolds number increases dramatically compared to its number at the outer diameter of the media bed. This can
10 create large pressure drops and force fine suspended solids to migrate through the bed, particularly whilst the bed is in wash mode whilst on line.

Statements of Invention

15 According to a first aspect of the present invention there is provided a radial or crossflow filter comprising a housing containing filter media, a contaminated flow inlet and a discharge outlet, the contaminated flow inlet
20 comprising a manifold situated within the housing, the manifold having a flow outlet which directs flow laterally, away from the discharge outlet.

Preferably, the flow outlet is directed towards a
25 sidewall of the housing. Preferably, the manifold is provided with a plurality of flow outlets.

Preferably, the housing is a vessel, such as a pressure vessel or tank. Preferably, the flow inlet comprises a
30 substantially vertically aligned elongate manifold with a plurality of flow distribution outlets disposed along its length.

Preferably, a discharge chamber is provided within the housing which is upstream of the discharge outlet and which contains a second filter media which is of a larger average particle size than the rest of the filter media in the housing. Preferably, the discharge chamber surrounds the discharge outlet. Preferably, the discharge chamber is formed from a filter screen. Most preferably the filter screen tapers inwardly towards a bottom of the housing.

According to a preferred embodiment, there is provided a radial or crossflow media filter that has a combined inlet and distribution system for raw water to be treated. The distribution system can be made up of a series of cylindrical and torroidal shaped piping which has an array of distribution nozzles, slots or holes designed with an open area distribution such that they direct the flow outwardly and distribute it equally away from the discharge outlet. Most preferably, the flow is directed towards a sidewall of the housing so that it rebounds off the inside of the housing, thereby directing the resultant flow inwardly towards the centre in the case of a radial filter, or across from the inlet side to the outlet side in the case of a crossflow filter.

The discharge outlet may be provided with a filter screen which defines the chamber containing the second filter media. The chamber may retain a media support bed made up of a larger particulate material than the particulate material used for filtering, in order to inhibit loss of such fine media to the clean water side or blockage of

the clean water collection screens, which may comprise small slots or holes.

Preferably, a fluidising unit is provided to remove and wash media and replace it back into the housing, whilst the filter unit is on line.

Preferably, a second fluidising unit is provided to enable the washing of the media support bed and replacement of the bed without the need to enter the housing.

Preferably, filter media to be cleaned in a cyclonic or counterflow wash vessel passes through one of the following:-

- a) A tubular ultrasonic unit; and/or
- b) A heating unit (for example an induction coil or a microwave heating device).

Preferably, means is provided for using AC or DC current, or magnetic force to re-enforce or neutralise a given Zeta potential on either contaminates, media, or fluid being filtered.

According to a second aspect of the present invention there is provided a filter comprising a housing containing filter media, a contaminated flow inlet and a discharge outlet, the contaminated flow inlet comprising a substantially vertically aligned elongate manifold with a plurality of flow distribution outlets disposed along its length.

According to a third aspect of the present invention there is provided a filter comprising a housing containing a first filter media, a contaminated flow inlet, a discharge outlet, and a discharge chamber within the housing which is upstream of the discharge outlet and which contains a second filter media which is of larger average particle size than the first filter media. Preferably, the discharge chamber is formed from a filter screen. Preferably, the filter screen tapers inwardly towards a bottom of the housing.

An advantage of present invention is that, because the contaminated inlet flow is spread evenly through the filter bed, the contaminated inlet flow to be filtered only has to be pre-screened to remove the largest suspended particles. This might be particles of approximately one seventh of the inside diameter of the fluidising unit's slurry outlet pipe. For example, in the case where the inside diameter of the fluidising unit's slurry outlet pipe was 20mm, the largest permissible particle to enter the filter vessel should be equal to or less than 3mm. The fluidising unit internal diameter could be chosen to manage a given particle size in the contaminated flow inlet.

A further advantage is that the contaminated flow inlet to the filter vessel or tank receives and distributes flow evenly over the complete surface area available for filtration of the granular media bed in any of the following modes; radial, downflow, crossflow and upflow, whilst being capable of receiving high concentrations of solids. Also, within the aforementioned limits of

particle sizes, some of the granular media filter bed's media particles that may under certain conditions find their way into the raw water distribution system are prevented from flowing back into the raw water inlet.

5

A further advantage is that a filter in accordance with the present invention does not require an infill of support media of pea gravel or concrete at its base in order to avoid stagnant zones which have the potential to sustain biological activity.

10

Preferably, very fine ceramic spheres with selected or forced Zeta potential are used as the filter media. This will enable the unit to achieve extremely high removal efficiencies of very fine particles. This has normally been a barrier in fine media filtration as it would require a coarse strainer for the removal of particles of approximately 80 microns and above (particularly for use in cleaning backwash water), upstream of a fine filter.

20 The reason for this coarse straining would be to remove the large particles in an attempt to make use of the voidage of the filter media bed and to ensure that the solids holding capacity of the bed was not reduced by contamination with larger particles. For a downflow dual

25 media filter, two media types, i.e. large particles above small particles, could be employed, thus creating a large solids holding capacity in the upper large media (typically anthracite), and a smaller voidage on the lower smaller fine filter media (typically sand or

30 garnet) in an attempt to create true depth filtration, i.e. penetration of contaminate particles throughout the

filter bed as opposed to edge filtration on the top of the media.

A conventional dual media filter is a very efficient system for fine filtration, but requires complex backwash sequences which encompass the use of large volumes of air typically via a roots blower, together with large volumes of wash water, typically pre-screened to 80 microns (in the case of potable water filtration it would be necessary to use fully treated potable water), and arranged such that it can be controlled for both low and high flowrates. Backwashing such a filter has always been limited to the upwards velocity which would cause the media itself to leave the vessel, which necessitates a slow wash for a long time.

Hence a great deal of waste water is generated, having a low concentration of contaminants in it. By utilising a single media with a high density but small size, acceptable filtration can be achieved, but for shorter run times as the smaller the media grains become the more the filter acts as an edge filter, as opposed to a full volume filter. This, together with a lower voidage volume available for contaminant holding in the small media, causes a faster growth in pressure drop across the bed, hence requiring more frequent washing.

In the present invention, one method of filtration is the use of radial flow, together with downflow, to achieve the required filtration using small high density spherical media. Particular attention should be paid to the Zeta potential of the media and the smaller

contaminant particles to maximise the use of the dense layer of charged ions (the Stern Layer) around the said particles in the liquid. Whereas this potential has been known for some time, its use has been limited, partially
5 due to the lack of solids holding capacity when using very small media.

In the present invention it is possible to wash the entire media bed in a very short time utilising minimal
10 potable water or in some cases raw inlet water. Due to this ability, together with the potential for online washing (washing of the media whilst the filter is still filtering water) it is now practical to design an efficient filter that can manage high concentrations of
15 suspended solids, which can include quite large particles, yet achieve very high water qualities. Such a filter can replace a coarse strainer, fine media filter, and in some cases a polishing cartridge filter, with a single unit that will have a lower plot area, lower
20 weight and potentially a lower capital cost, than the aforementioned three units.

As a suitable media support arrangement that can be cleaned is supplied in accordance with the present
25 invention, the diameter of the central collection screen can be increased, which lowers the fluxrates and Reynolds number as it approaches the centre of the media bed.

In accordance with another feature of the present
30 invention, the distribution of water to be filtered is controlled accurately, such that all areas of the filter bed receive as near as possible the same flow (flow

sharing), thus avoiding channelling or flow taking the least line of resistance to the central collection screen. A further mechanical advantage is that the present invention excludes joints which are potential leak paths from the dirty water side to the clean water side, inside the housing (particularly where the housing is pressurised), ensuring therefore that no dirty water can leak to the clean water. Any such joints are preferably positioned on the outside of the vessel for maintenance reasons.

Brief description of drawings

For a better understanding of the present invention, and to show more clearly how it may be carried into effect, reference will now be made, by way of example, to the accompanying drawings, in which:-

Figure 1 is a plot of a typical suspended solids concentration as may be seen during a plankton bloom in seawater;

Figure 2 is a cross-sectional view of a radial media filter and shows the inward radial flow created by the distribution system towards a central clean water collection screen;

Figure 3 is a sectional view of a pressurised radial media filter;

Figure 4 is a sectional view of a cross flow media filter;

Figure 5 is a sectional view of an alternative embodiment of radial filter;

Figure 6 is a sectional view of a downflow atmospheric media filter; and

Figure 7 is a sectional view of an upflow atmospheric media filter.

10 Detailed Description of Preferred Embodiments

From the plot of Figure 1 it can be seen that a lower number of larger particles account for the bulk of the volume of contaminants. In a conventional filtration process, it would be normal to attempt to remove the vast majority of these large particles at some cut off point, in this example around 80 microns and above with a coarse filter, so that any fine filtration would only need to remove smaller particles. The present invention seeks to achieve this degree of filtration with one filtration step.

Referring to Figures 2 and 3, a pressure vessel or tank 1 has an inlet means 2 for raw water to be treated which connects with a distribution ring 3. The distribution ring 3 has a plurality of flow distribution heads 4, to distribute a portion of the inlet flow upwards to the top of the vessel 1, and a plurality of substantially vertical flow distribution tubes 5 which have distribution holes or slots 6 designed such that the flow of raw water is equally distributed and directed radially outwards against a wall of vessel 1, from where it

reverses flow and travels radially inwardly towards a central collection screen 7. After travelling through a filter media 9 the filtered water passes out of vessel 1 through a clean water discharge outlet 8.

5

A secondary central screen 10 is arranged outside and sealed to the central collection screen 7, to create an annulus and bottom chamber around screen 7, such that this annulus and bottom space can be filled with large media support material 11. At the base of the secondary screen 10 is fitted a secondary fluidising unit 37 that has an outlet 38 which connects with a media wash line 18. A valve means 39 is provided for the isolation of the support media outlet 38 when not in use, and a further valve means 39a is provided for the isolation of the secondary fluidising unit 37 when it is not in use.

The secondary fluidising unit 37 and its slurry outlet 38 are used as a means to remove the support media and wash it. Valve means 40 is opened with valve means 33 closed in order to return the clean support media from media wash vessel 23 back to the media support screen annulus and chamber surrounding screen 7. During this process to clean the support media, valve means 41 is normally closed to ensure no cross contamination of media and the filter would normally be off-line. A by-pass line can be included between inlet 36 to fluidising unit 37 and slurry outlet 38. The by-pass line can be provided with a control valve to control flow to adjust the concentration of support media removed.

A primary fluidising unit 12 is fed with raw or treated water under pressure, and flow is controlled via inlet 13 on vessel 1 such that it fluidises the filter media 9 and causes a discharge via outlet means 14 of the fluidising unit. The outlet means 14 passes through outlet means 15 of vessel 1, into media wash line 18. Valve means 16 which is also connected to the treated or raw water inlet, which feeds fluidising unit 12, is used to control the concentration of the discharged media slurry to the desired relative density best suited to the media cleaning stage. An instrument 17 for detecting the pressure drop between the raw water inlet 2 and the clean water outlet 8 for use in detecting the degree of contamination within the media bed 9 is used as a control function to initiate the washing of the filter bed.

In media slurry discharge line 18 an ultrasonic unit 19 may be used, if required, to impart to the slurry a cleaning action created by the use of high powered tubular ultrasonics devices. A heating means 20 such as a microwave generator or an induction coil, can be used to increase the temperature of the slurry passing through it to aid the cleaning process and where required adjust the viscosity of the liquid with a view to the combination or any part of 19 and 20 being used to regenerate, partially regenerate or surface scrub absorbent material, such as activated carbon. Chemical injection means 21 may be provided for the injection of a chemical such as a surfactant, detergent or enzyme, as may be required from time to time to assist in or accelerate media cleaning.

Media wash vessel 22, which has selective inlet means 23 or 24 controlled by valve means 25 or 26, delivers the media to be washed to a cyclonic cleaning means 27 which has an outlet for waste water 28 which is controlled by a flow control valve 29. A tertiary fluidising unit 30 of the type described above, is fed by water under pressure by valve means 32 and discharges cleaned media by discharge line 3 and valve means 33 to return it by line 34 back to a media return inlet 35 in vessel 1.

Alternatively, media to be cleaned can report to the top of media wash vessel 22 via inlet 24 which cleans the media by counter-current flow with valves 32 and 33 closed and valve 29 open. By either of these means the media 9 can be completely cleaned by removing and cleaning batch volumes of media until the media bed is turned over, either online whilst filtering, or offline as the case may be.

Figure 4 shows another configuration of the filter which is made up of tank 42 which is generally of a circular or rectangular shape. A flow inlet 43 allows flow to fall into an inlet chamber 44 defined by screen 45 which distributes flow horizontally across a media filter bed 9 to be collected by a collection screen 46 which defines a chamber 47. The chamber 47 can contain support media 11, and has a clean water outlet 47. A fluidising unit 12, having a media slurry discharge line 18, discharges into a media wash pan 48 which allows media to fall by counter-current flow into the media bed 9, whilst contaminants from the media being washed discharges through line 49.

Figure 5 shows a radial filter similar to that shown in Figure 2 with the following differences. The clean water collection screen 7, media support 11 and media support screen 10 are configured as shown in assembly 50 of Figure 5. All other features remain the same and the ability to clean the media support is retained, if required. The benefit of this conical clean water collection system is that, in the case of very fine media and high solids level in the raw water, this configuration will avoid media hang-ups, i.e. media not moving downwards, which will create a void at the base of the vessel, sometimes referred to as coning. Another feature of this radial filter is that a media wash cyclone 51 has its underflow coupled directly to return media to the top of the filter vessel 1 with its inlet from media close coupled to a jet pump 52 which is driven by raw water through line 53 and a booster pump 54. In the case of potable water the media washing stream would be potable water to avoid cross-contamination. The unit also has the ability to discharge filtrate from the base of the vessel through the discharge nozzle 55, or from the top of the vessel through the discharge nozzle 56.

Figure 6 is a downflow atmospheric media filter which has an air injector 57 upstream of the fluidising unit 12, in order to stabilise when required contaminated media which reports to a wash box 58 at the top of the filter vessel 1. The wash box 58 has a weir which is set below the normal water level which is constant in the upflow filter, which allows contaminants to float off into contaminant line 59.

Figure 7 is an upflow atmospheric media filter which may or may not utilise an air injector 57 on the upstream side of the fluidising unit 12 to wash the media in the same way as described in the downflow atmospheric filter 5 of Figure 6.

CLAIMS

1. A radial or crossflow media filter comprising a housing containing filter media, a contaminated flow inlet and a discharge outlet, the contaminated flow inlet comprising a manifold situated within the housing, the manifold having a flow outlet which directs flow laterally, away from the discharge outlet.
2. A filter as claimed in claim 1 in which the flow outlet is directed towards a sidewall of the housing.
3. A filter as claimed in claim 1 or 2 in which the manifold is provided with a plurality of flow outlets.
4. A filter as claimed in any one of the preceding claims in which the housing comprises a vessel or tank.
5. A filter as claimed in any one of the preceding claims in which the flow inlet comprises a substantially vertically aligned elongate manifold with a plurality of flow distribution outlets disposed along its length.
6. A filter as claimed in any one of the preceding claims further comprising a discharge chamber which is situated within the housing, is upstream of the discharge outlet and contains a second filter media which is of a larger average particle size than the rest of the filter media in the housing.
7. A filter as claimed in claim 6 in which the discharge chamber surrounds the discharge outlet.

8. A filter as claimed in claim 6 or 7 in which the discharge chamber is formed from a filter screen.

9. A filter as claimed in any one of claims 6 to 8 in which the filter screen tapers inwardly towards the bottom of the housing.

10. A filter as claimed in any one of the preceding claims in which a fluidising unit is provided in the base of the housing to fluidise the filter media and contaminants.

11. A filter as claimed in any one of the preceding claims in which a second fluidising unit is provided in the discharge chamber to fluidise the filter media and contaminants in the discharge chamber.

12. A filter as claimed in any one of the preceding claims further comprising a tubular ultrasonic unit.

13. A filter as claimed in any one of the preceding claims further comprising a heating unit.

14. A filter as claimed in any one of the preceding claims further comprising means for applying AC or DC current and/or magnetic force to the filter media and/or contaminants present in the filter media and/or fluid being filtered.

15. A filter substantially as described herein with reference to and as shown in figures 2 and 3, figure 4,

figure 5, figure 6 or figure 7 of the accompanying drawings.

ABSTRACTFILTRATION APPARATUS

A radial or crossflow media filter comprising a housing
5 such as a vessel or tank 1, the housing containing filter
media 9, a contaminated flow inlet 2 and a discharge
outlet 8, the inlet comprising a manifold 5 situated
within the housing, the manifold 5 having flow outlets 6
which are directed laterally, away from the discharge
10 outlet 8. The flow inlet may comprise a substantially
vertically aligned elongate tubular manifold 5 with a
plurality of flow distribution holes or slots disposed
along its length. Furthermore, the discharge outlet 8
may be accessed through a chamber within the housing
15 which contains a second filter media 11 which is of
larger average particle size than the first filter media
9.

fig (1)

1/6

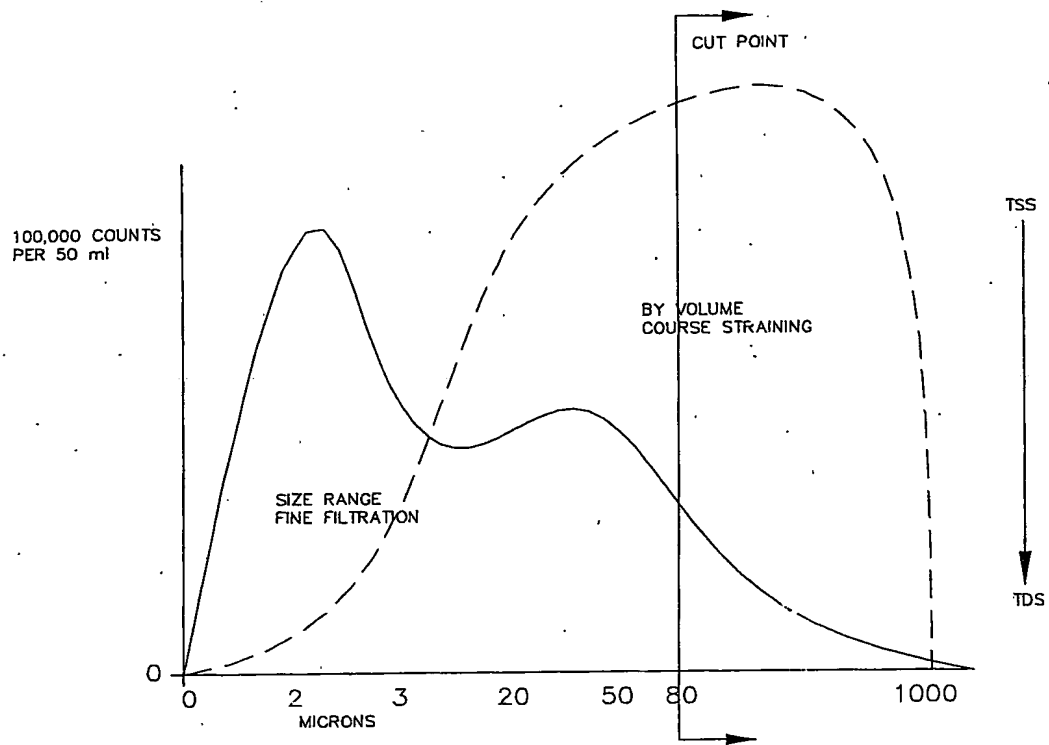


fig (2)

2/6

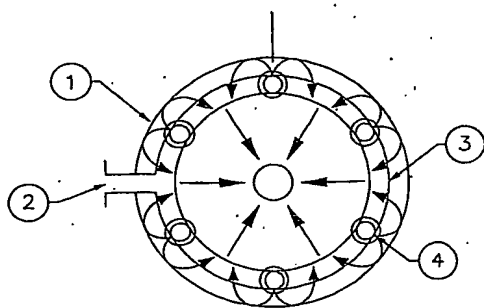


fig (3)

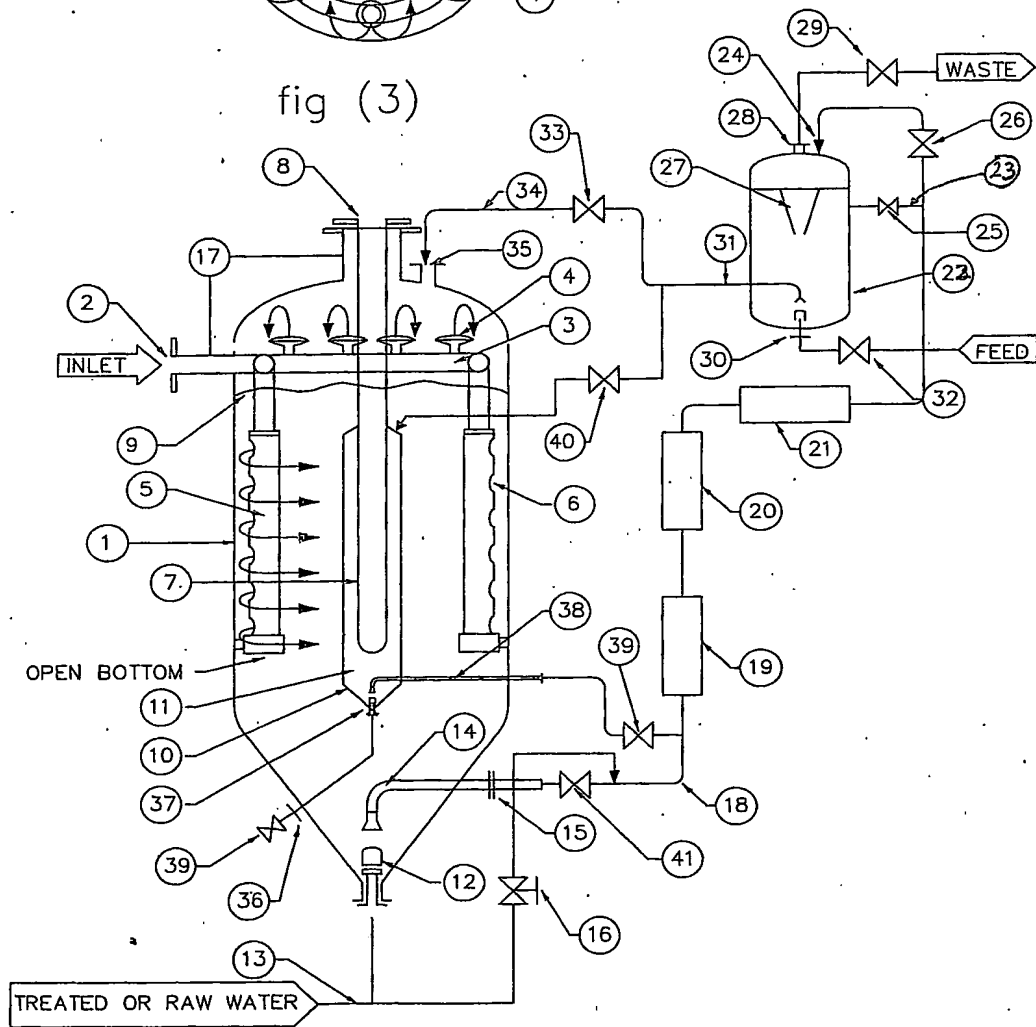


Figure 4

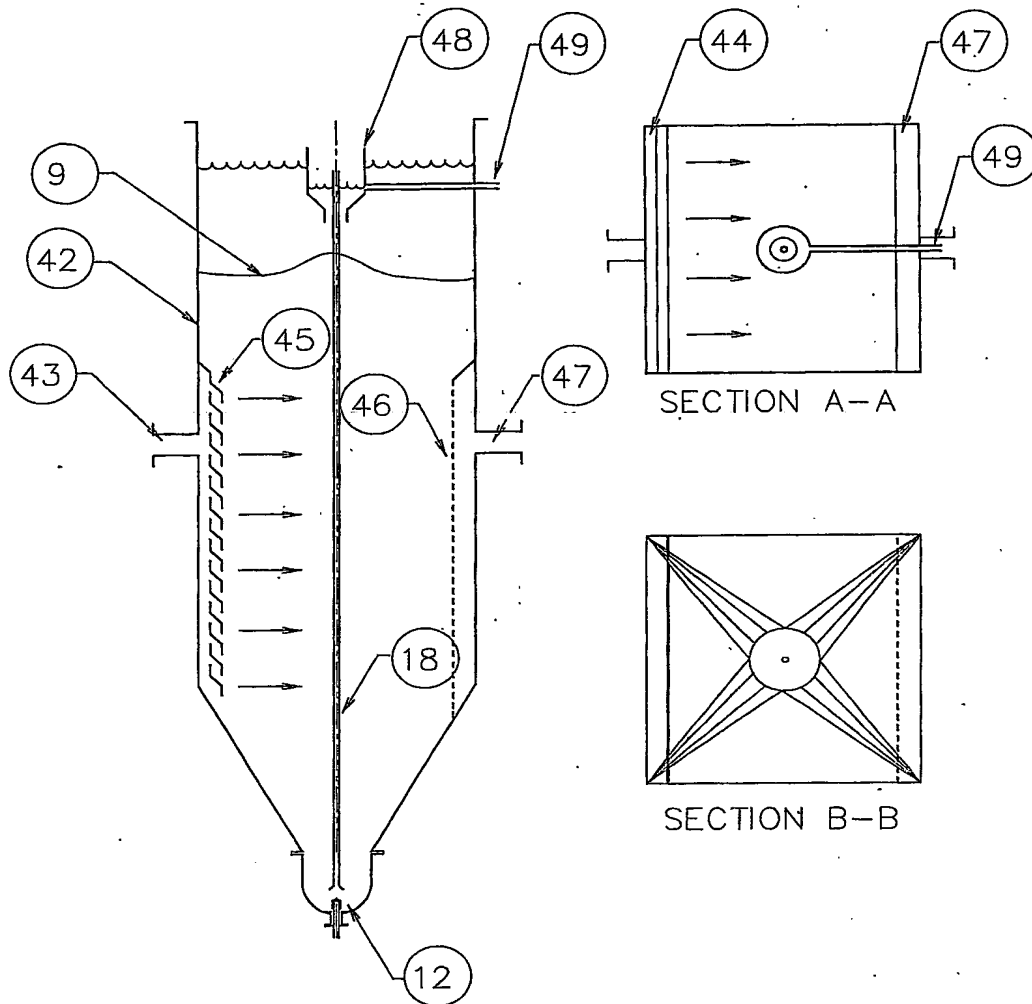


fig (5)

4/6

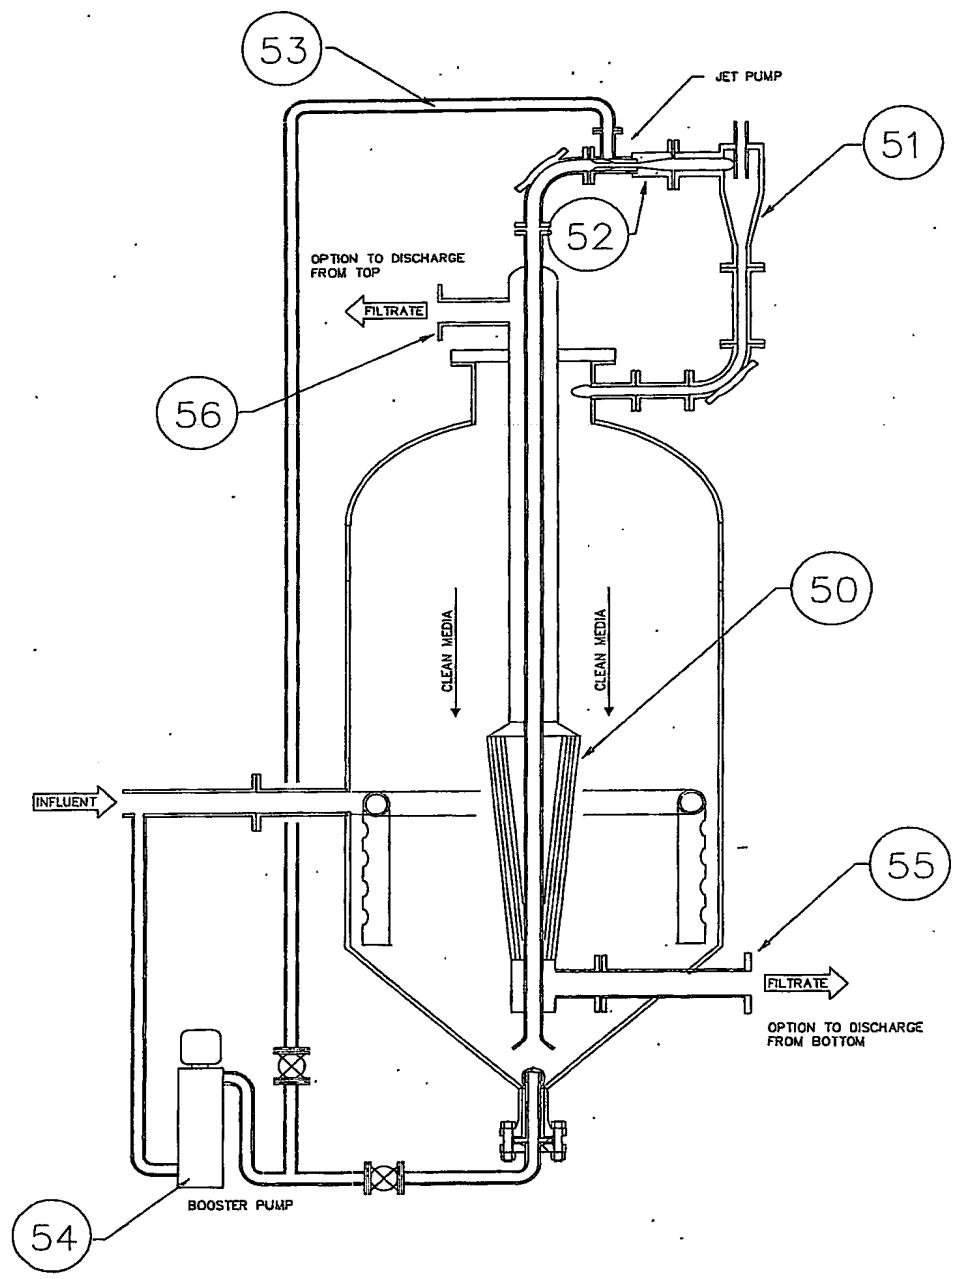


fig (6)

516



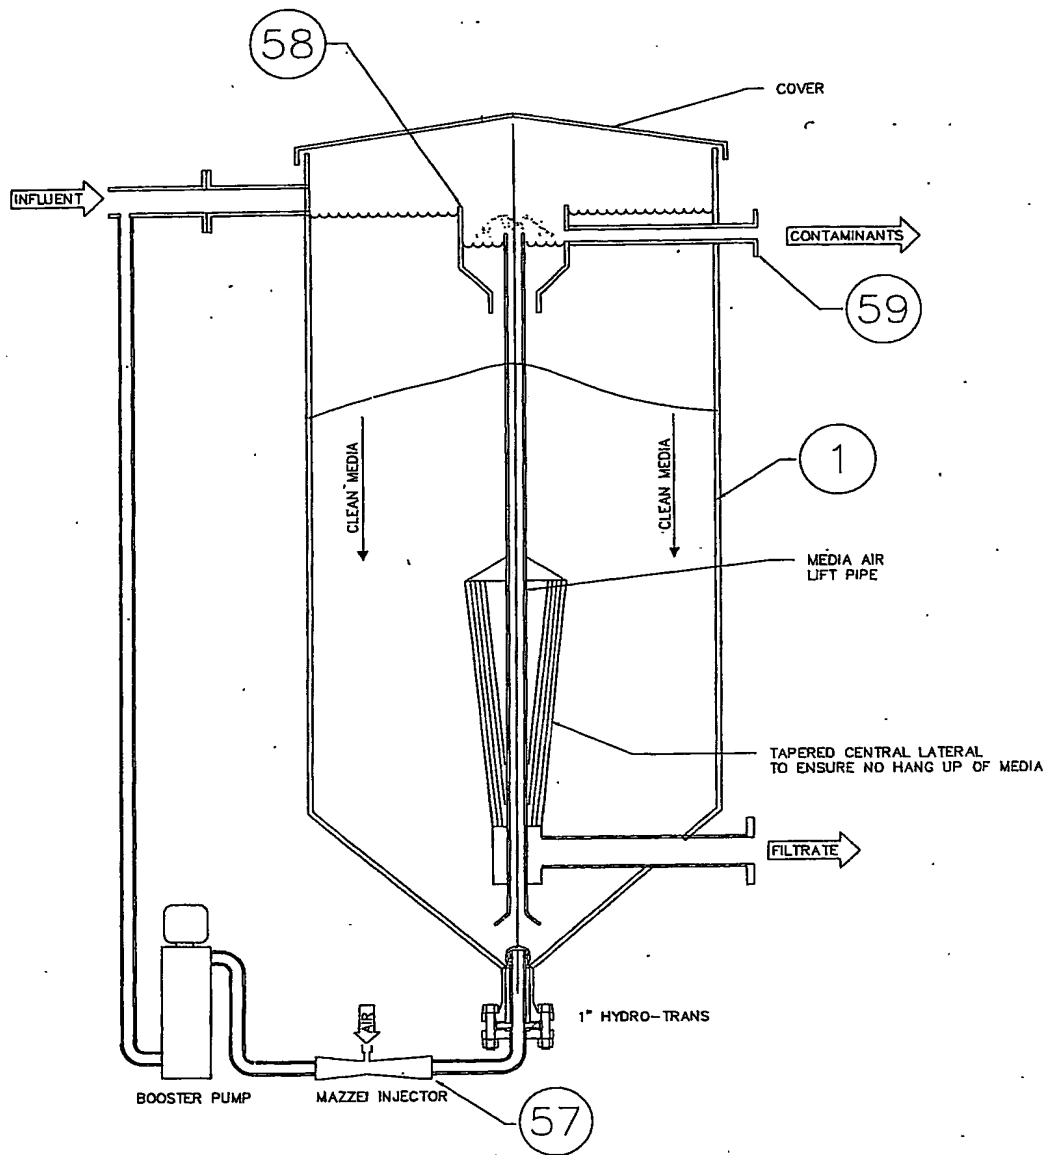


fig (7)

6/6

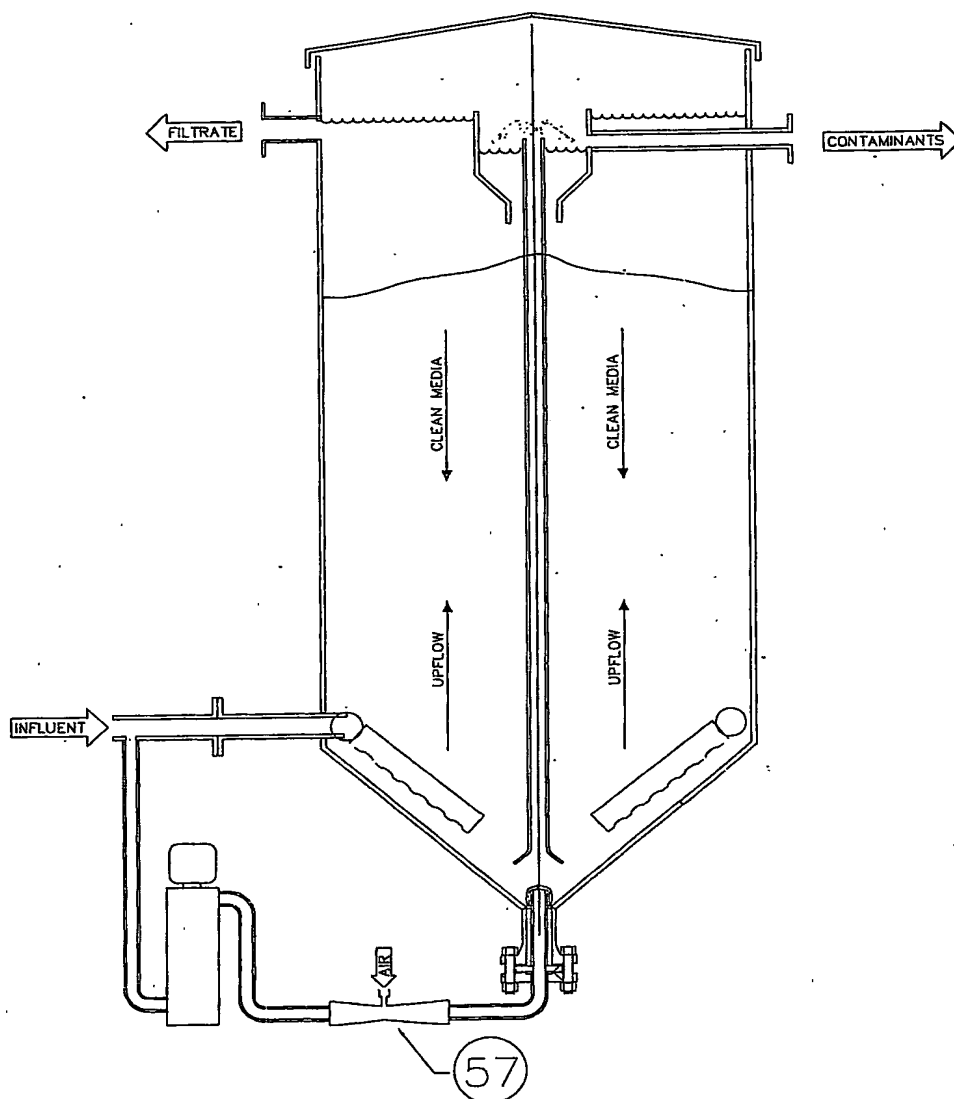

PCT/GB2004/001351



This Page is inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images
problems checked, please do not report the
problems to the IFW Image Problem Mailbox**